

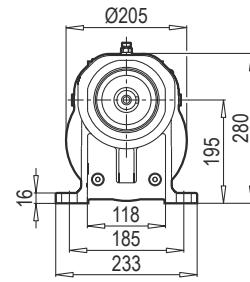
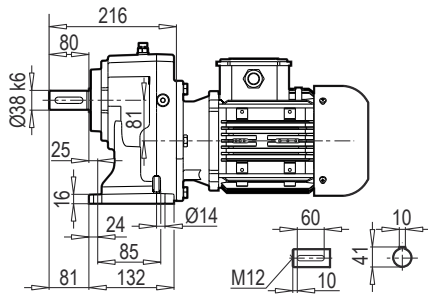
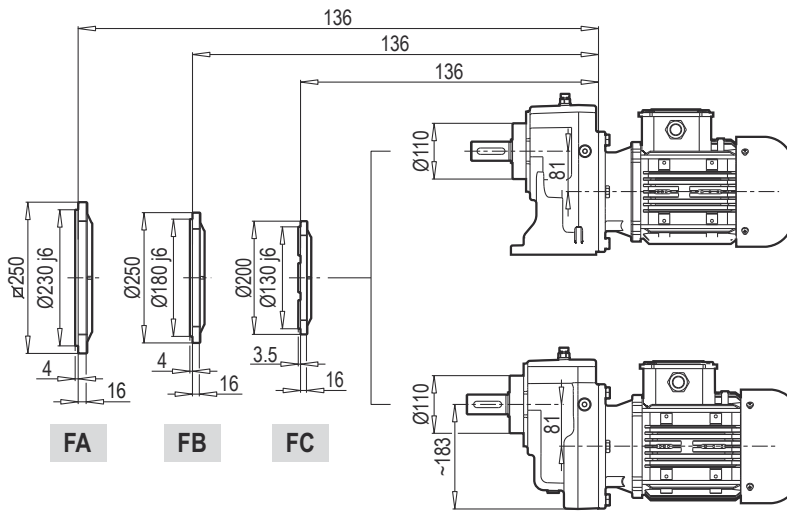


A/F 501


A 501

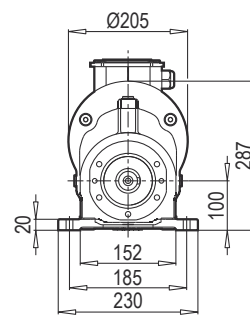



AF-M 501

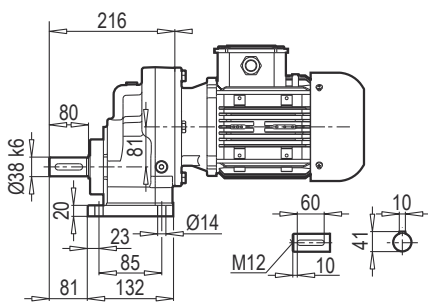


AF 501




F 501

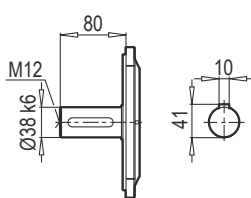







FA





FB



FC

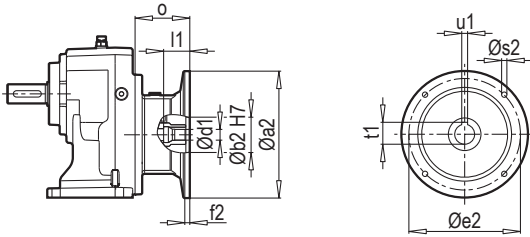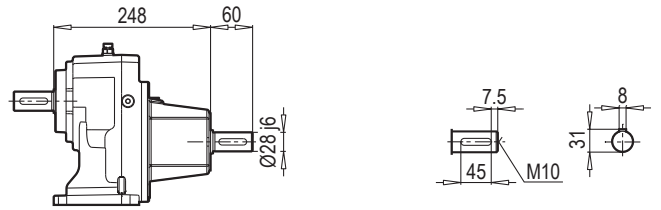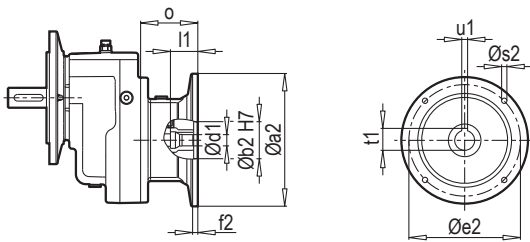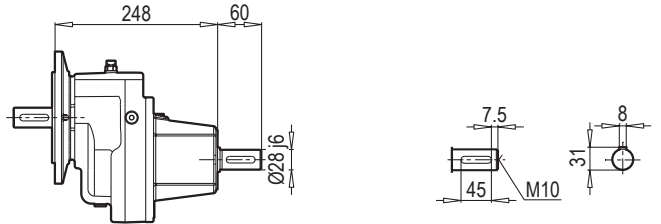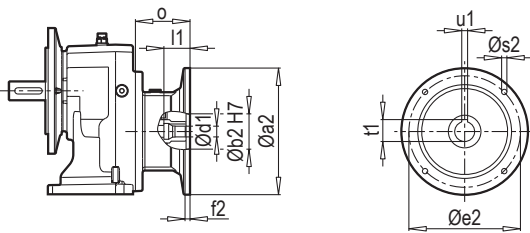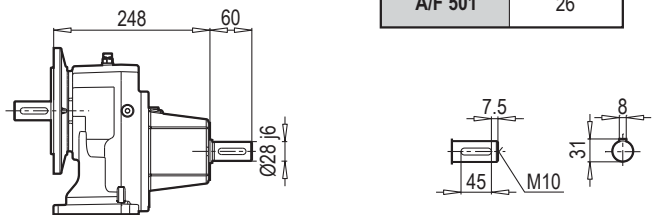A 501 PAM B5/B14

A 501 W

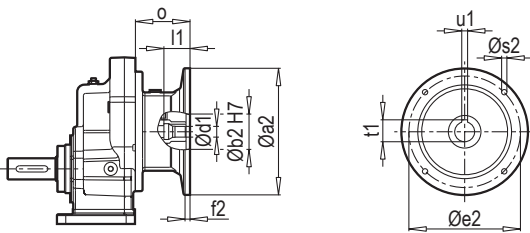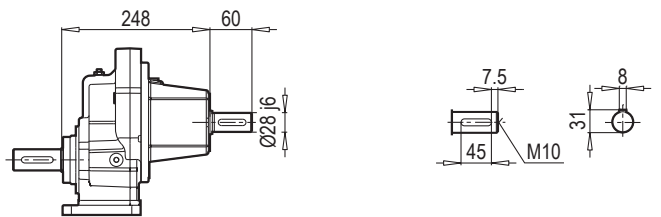F 501 PAM B5/B14

F 501 W

AF 501 PAM B5/B14

AF 501 W


W ~	
A/F 501	26

AF-M 501 PAM B5/B14

AF-M 501 W


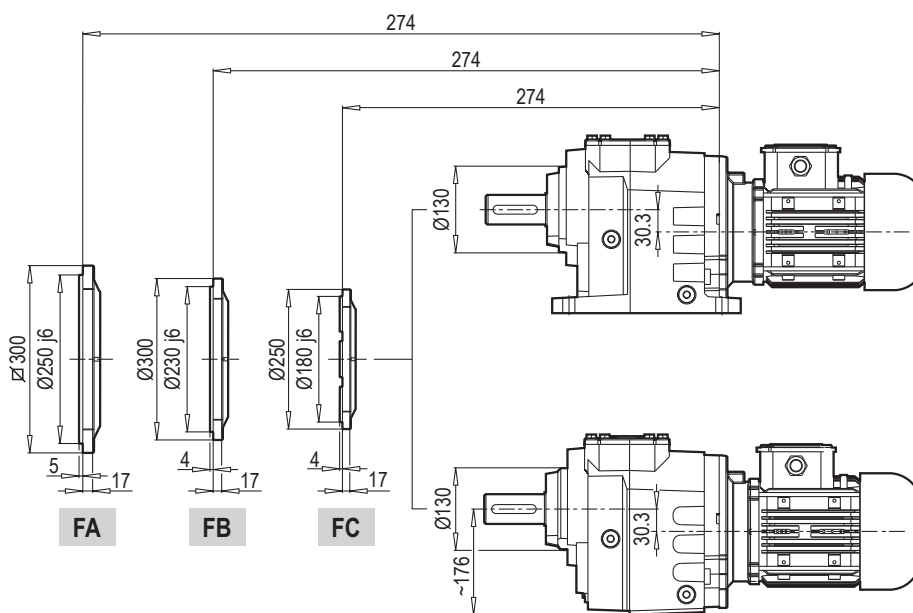
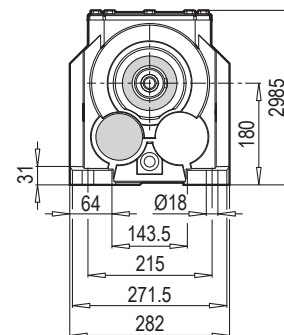
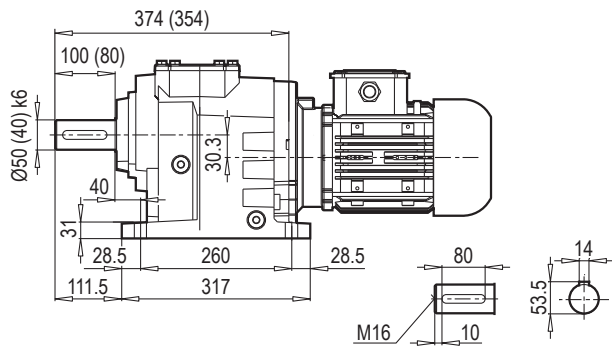
Редуктор	PAM B5	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 501	80	200	130	165	5	M10	19	42	21.8	6	70
	90	200	130	165	5	M10	24	52	27.3	8	70
	100	250	180	215	5.5	M12	28	62	31.3	8	85
	112	250	180	215	5.5	M12	28	62	31.3	8	85
	132	300	230	265	5.5	M12	38	82	41.3	10	110

~	
PAM B5	A/F 501
80	22
90	22
100	25
112	25
132	27


Редуктор	PAM B14	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 501	80	120	80	100	3	7	19	42	21.8	6	70
	90	140	95	115	3	9	24	52	27.3	8	70
	100	160	110	130	3.5	9	28	62	31.3	8	85
	112	160	110	130	3.5	9	28	62	31.3	8	85
	132	200	130	165	3.5	11	38	82	41.3	10	110

~	
PAM B14	A/F 501
80	18.5
90	18.5
100	21
112	21
132	24



A 502-503




AF 502-503

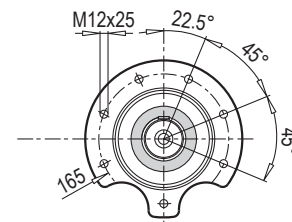


F 502-503

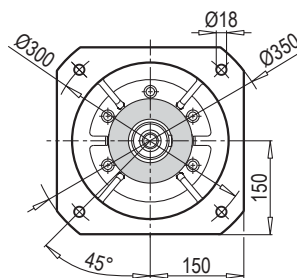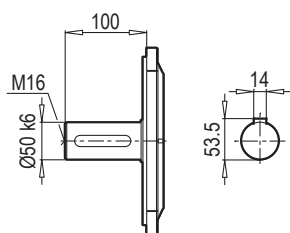

FA




FB




FC


A 502-503 PAM B5/B14

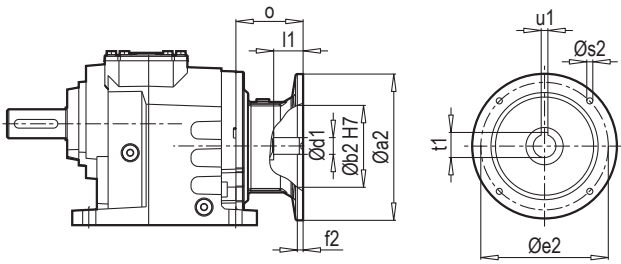


A 502-503 W

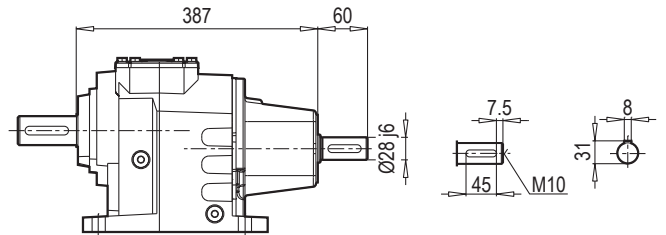


F 502-503 PAM B5/B14

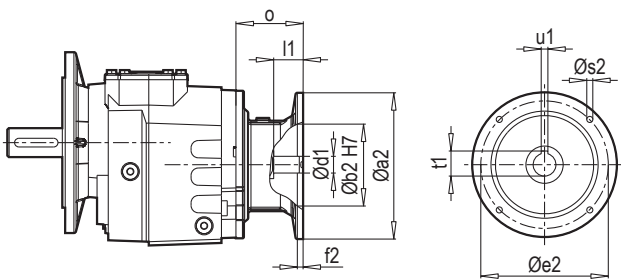


F 502-503 W

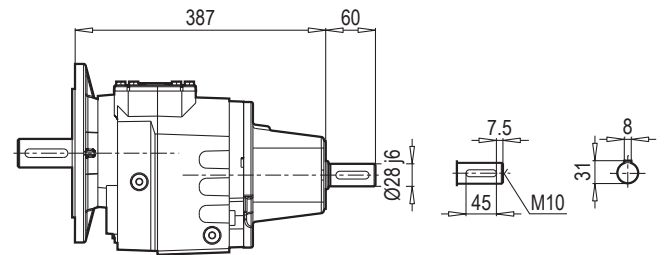

AF 502-503 PAM B5/B14

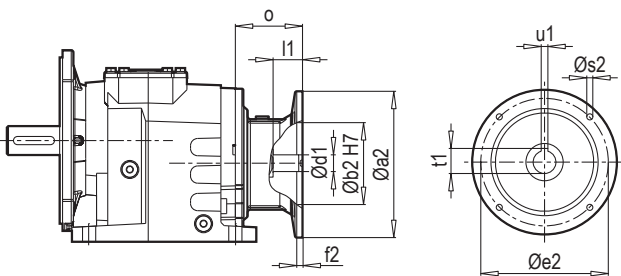

AF 502-503 W

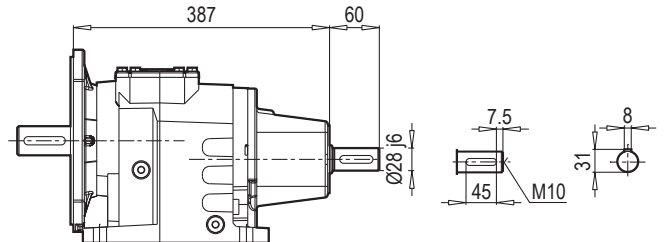

W ~ $\frac{K_r}{K_f}$	
A/F 502-503	54

Редуктор	PAM B5	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 502 A/F 503	80	200	130	165	5	M10	19	42	21.8	6	70
	90	200	130	165	5	M10	24	52	27.3	8	70
	100	250	180	215	5.5	M12	28	62	31.3	8	85
	112	250	180	215	5.5	M12	28	62	31.3	8	85
	132	300	230	265	5.5	M12	38	82	41.3	10	110
	160	350	250	300	7	M16	42	112	45.3	12	158

~ $\frac{K_r}{K_f}$	
PAM B5	A/F 502-503
80	52
90	52
100	54
112	54
132	58
160	65

Редуктор	PAM B14	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
A/F 502 A/F 503	80	120	80	100	3	7	19	42	21.8	6	70
	90	140	95	115	3	9	24	52	27.3	8	70
	100	160	110	130	3.5	9	28	62	31.3	8	85
	112	160	110	130	3.5	9	28	62	31.3	8	85
	132	200	130	165	3.5	11	38	82	41.3	10	110

~ $\frac{K_r}{K_f}$	
PAM B14	A/F 502-503
80	48
90	48
100	50
112	50
132	55

Редуктор	i	4- пол. 50Гц 1400об/мин n ₂ [об / мин]	M _a макс f _B =1 4 - пол. [Нм]	P ₁ макс W f _B ≥ 1			PAM - IEC										
				4 - пол. 1400об/мин [кВт]	FR1 [кН]	FR2 (M) [кН]											
A503 F503 W 1 + PAM - IEC 1	222.59	6.3	1800	1.19	2.9	18.0	80	90	90								
	194.86	7.2	1800	1.35	2.9	18.0	80	90	90								
	178.98	7.8	1800	1.47	2.8	18.0	80	90	90								
	162.21	8.6	1800	1.63	2.8	18.0	80	90	90								
	154.52	9.1	1800	1.71	2.8	18.0	80	90	90	100	112	132					
	142.00	9.9	1800	1.86	2.8	18.0	80	90	90	100	112						
	+ PAM - IEC	124.25	11.3	1800	2.12	2.8	18.0	80	90	90	100	112	132				
	112.61	12.4	1800	2.34	2.7	18.0	80	90	90	100	112	132					
	97.80	14.3	1800	2.70	2.7	18.0	80	90	90	100	112	132					
	85.33	16.4	1800	3.09	2.7	18.0	80	90	90	100	112	132					
	78.64	17.8	1800	3.36	2.6	18.0	80	90	90	100	112	132					
	71.27	19.6	1800	3.70	2.6	18.0	80	90	90	100	112	132					
	56.21	24.9	1600	4.17	2.5	18.0	80	90	90	100	112	132					
	A502 F502 W 1 + PAM - IEC 1	48.77	28.7	1600	4.81	2.4	18.0	80	90	100	112	132					
43.32		32.3	1600	5.41	2.4	18.0	80	90	100	112	132						
39.21		35.7	1600	5.98	2.3	17.7	80	90	100	112	132						
34.83		40.2	1600	6.73	2.2	16.7	80	90	100	112	132						
31.57		44.3	1600	7.43	2.1	16.0	80	90	100	112	132						
28.26		49.5	1600	8.30	2.0	15.1	80	90	100	112	132						
+ PAM - IEC		26.98	51.9	1600	8.69	2.0	14.8			100	112	132	160				
23.14		60.5	1600	10.14	1.8	13.7			100	112	132	160					
21.69		64.5	1600	10.81	1.7	13.2			100	112	132	160					
19.66		71.2	1600	11.93	1.6	12.6			100	112	132	160					
18.81		74.4	1500	11.69	1.6	12.7			100	112	132	160					
16.86		83.0	1500	13.04	1.5	12.1			100	112	132	160					
15.13		92.6	1500	14.54	1.3	11.4			100	112	132	160					
13.71		102.1	1400	14.97	1.3	11.3			100	112	132	160					
11.20		125.0	1100	14.39	1.3	11.5					132	160					
9.01		155.4	900	14.65	1.3	11.2					132	160					
8.16	171.5	800	14.36	1.3	11.2					132	160						
7.55	185.5	800	15.54	1.2	10.8					132	160						
6.07	230.6	700	16.91	1.0	10.3					132	160						
5.50	254.5	700	18.65	0.8	9.8					132	160						
A501 F501 W 1 + PAM - IEC 1	8.56	163.6	350	6.00	2.5	4.0	80	90	100	112	132						
	7.60	184.2	350	6.75	2.4	4.0	80	90	100	112	132						
	6.17	227.0	340	8.08	2.3	3.9	80	90	100	112	132						
	5.62	249.3	330	8.62	2.2	3.7	80	90	100	112	132						
	4.73	295.8	320	9.91	2.1	3.5			100	112	132						
	4.06	344.9	320	11.56	1.9	3.3			100	112	132						
	+ PAM - IEC	3.78	370.6	310	12.03	1.9	3.2			100	112	132					
	3.30	424.2	310	13.77	1.7	3.0			100	112	132						
	2.58	541.9	280	15.89	1.5	2.8			100	112	132						
	1.97	712.3	230	17.15	1.4	2.7					132						
1.46	960.8	220	22.13	0.9	2.4					132							
1.32	1057.1	200	22.14	0.9	2.3					132							